



Paroc Panel System:	Reface	Detail No.:	RF-E-701
Type: Cladding Detail		Scale: 1:5	Revision: A
Subject: Paroc Reface Door frame		Date: 07.03.2016	Revision Date: 12.04.2021
		Signature: JoW	Revision Signature: JeN

Notice: Principle Master Detail


Project specific changes on designer's responsibility

Copyright Paroc Panel System 2019-07-01

Information about joint sealants can be found in details OR-E-105 and OR-E-106.

**Attention!**  
 Joints always at same level for cover flashings as for horizontal panel joint!  
 Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!




(TT-51) Flashing sealant stripe, butyl, grey

(FS-11) Flashing screw, RST c/c 300 mm


Drip flashing + safety flashing

(FS-11) Flashing screw, RST c/c 500 mm

(FS-11) Flashing screw, RST c/c 300 mm

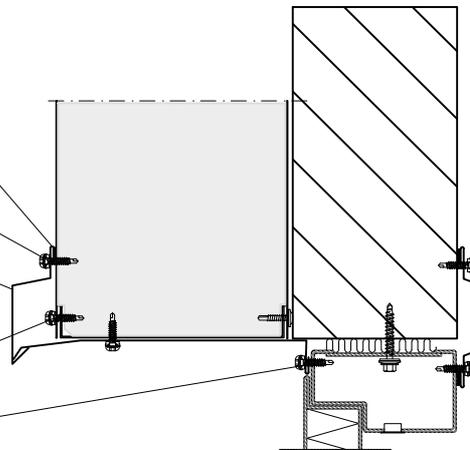

Side frame

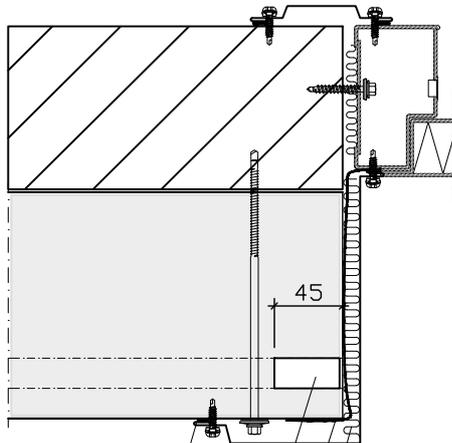



(TT-33) Flashing sealant tape

Jamb flashing

Ventilation channel, to be done at site

(TT-71) Foil Tape, LDPE

(TR\_\_\_) Joint insulation, Stone wool



This detail has been done to help architects, engineers and installers when using PAROC panels. Before using this detail, check latest version at [www.parocpanels.com](http://www.parocpanels.com)